

RO6-8038-N Product Line Sanitary Reverse Osmosis (RO) Element

Physical Dimensions


Membrane Element	Membrane Area	Element Length "A"	Element Diameter "B"	Permeate Tube ID "C"
RO6-8038-31N [†]	340ft ² (31.59m ²)	38in (965.2mm)	8.0in (203.2mm)	1.125in (28.57mm)
RO6-8038-46N	295ft ² (27.41m ²)	38in (965.2mm)	8.0in (203.2mm)	1.125in (28.57mm)

[†](31-80) Feed spacer net thickness (mils)

Operating Parameters[‡]

Feed Spacer Thickness	Max. Element ΔP	Recommended Design Cross Flow
31 Mil	15 psi (1 bar)	70 gpm (15.9 m ³ /h)
46 Mil	15 psi (1 bar)	80 gpm (18.2 m ³ /h)

[‡]Recommended Nominal Values

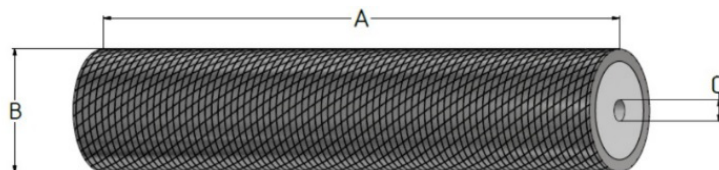

<0.1 ppm free chlorine in feed stream
Max. 1000 ppmh chlorine resistance

RO6 Membrane Information [‡]	
Rejection [*]	99.5%
Process pH Limitations	3-10
Max. Process Temperature	122°F (50°C)
CIP pH Limitations @122°F (50°C)	2-11
Max. CIP Temperature ^{**}	122°F (50°C)

^{*}Marker: NaCl 2,000 mg/l @ 800 psi (55.2 bar)

^{**} Consult factory for detailed cleaning instructions

Complies with 3A Sanitary Standards, FDA (CFR Title 21), EU Commission Directive 2002/72/EC.

High temperature, high pressure and specialty configurations are also available.

Consult Nanostone or visit our website for more information.